

TEREX AERIALS

simple, available and cost effective



Q-135  
TS 44





**HOLLAND LIFT**



UK

# Q-135 TS 44

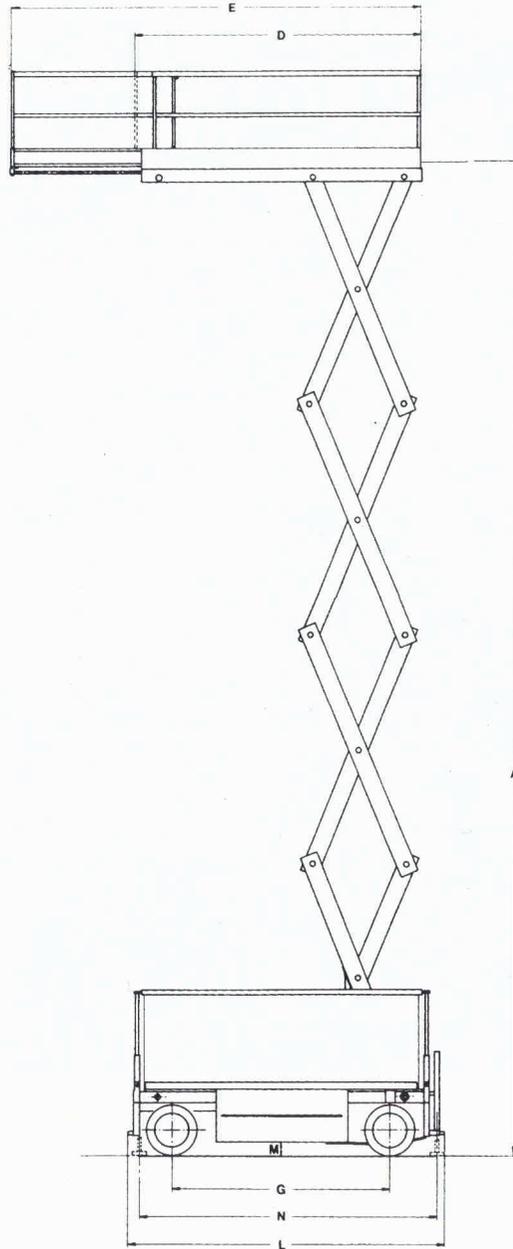

	Q-135EL18 TS 44 E	Q-135EL24 TS 44 W	Q-135DL24-4WD/P TS 44 RT	
A	Working height	± 15,50 m	± 15,54 m	± 15,54 m
	Max. platform height	± 13,50 m	± 13,54 m	± 13,54 m
C	Min. platform height	± 1,82 m	± 1,86 m	± 1,86 m
D x F	Platform dimensions (retracted)	4,26 x 1,78 m	4,26 x 2,30 m	4,26 x 2,30 m
E x F	Platform dimensions (extended)	6,06 x 1,78 m	6,06 x 2,30 m	6,06 x 2,30 m
	Platform extension (hydraulic)	1,80 m	1,80 m	1,80 m
H1	Transport height	2,98 m	3,02 m	3,02 m
H2	Transport height (handrail folded)	2,20 m	2,24 m	2,24 m
L x B	Transport dimensions	4,46 x 1,80 m	4,46 x 2,40 m	4,46 x 2,40 m
G	Wheelbase	3,09 m	3,09 m	3,09 m
M	Ground clearance (center)	235 mm	275 mm	275 mm
	Turning radius outside	± 4,70 m	± 4,70 m	± 4,70 m
	Capacity main-platform	500 kg	500 kg	500 kg
	Capacity roll-out deck	500 kg	500 kg	500 kg
	Lift- / lower time (max. load)	± 60 / 70 sec.	± 60 / 70 sec.	± 60 / 70 sec.
	Driving speed (high)	2,6 km/h	2,6 km/h	3,0 km/h
	Driving speed (crawl)	0,5 km/h	0,5 km/h	0,5 km/h
	Gradeability	± 25 %	± 25 %	± 30 %
	Tyres, solid rubber	28 x 9 - 15	□	--
	Tyres, terrain (foamfilled)	--	31 x 12,5 - 15	--
	Tyres, tractor (foamfilled)	--	□	12 - 16,5 NHS
	Power, electrical (impuls)	3x3,7 kW/48V	3x3,7 kW/48V	--
	Batteries (traction acid)	400 Ah / k5	400 Ah / k5	--
	Charger (WU1a)	40 A	40 A	--
	Power, diesel Hatz Silentpack	--	--	2L 40-C
	Gross weight	6.880 kg	7.370 kg	7.400 kg
	<b>Features</b>			
	Controlbox w/ quickdisconnect	■	■	■
	Drive, proportional	■	■	■
	Fourwheel drive (4WD)	--	--	■
	Levelling jacks (N)	--	--	□
	Oscillating axle (P)	--	--	■
	<b>Safety features</b>			
	Scissor skirt	■	■	■
	Slope sensor (long / side) -with beeper	3° / 3°	3° / 3°	3° / 3°
	Drive alarm	■	■	■
	Emergency descent	■	■	■
	Emergency platform retraction (handpump)	■	■	■
	<b>Application</b>			
	Indoors	■	■	■
	Outdoors	--	■	■
	Certified min. temperature	- 15 ° C	- 15 ° C	- 15 ° C

■ Standard □ Optional -- not available

Subject to change without notice